



Premium flexible barrier hose with standard fittings

Soft Magic® Barrier Hose


Rated for R-410A, CFC, HCFC
and HFC refrigerants

FOR U.S. JOBS
UNIWELD EMPLOYS OVER 300 WORKERS



Maximum Working Pressure: 800 PSI
Burst Pressure: 4000 PSI

Standard Fitting
(actual size)

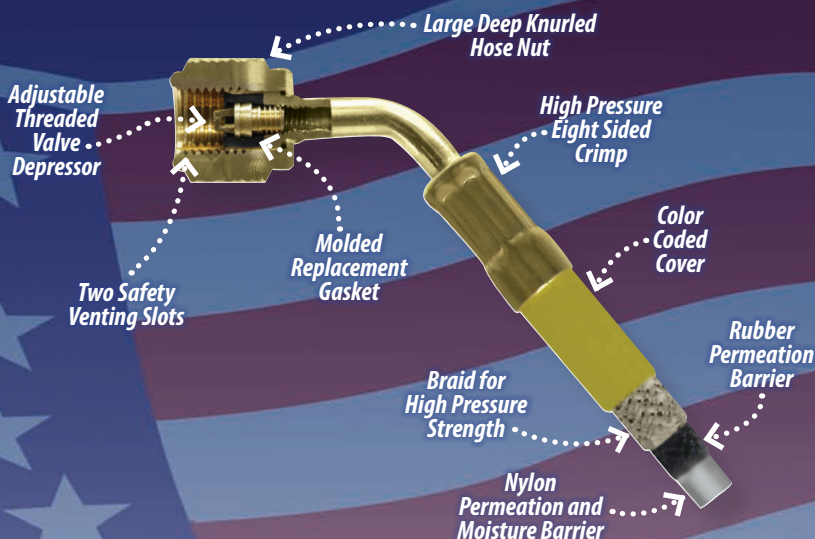

Soft Magic®
Barrier Hoses
with
Standard
Fittings

Length

Red

Part#

Yellow

Part#

Blue

Part#

Hose Set 1 Each R, Y, B
Part#

6" 15cm
12" 30cm
24" 60cm
36" 90cm
48" 120cm
60" 150cm
72" 180cm
96" 240cm
25' 7.50m
50' 15.00m
100' 30.00m

H06SMBR
H1SMBR
H2SMBR
H3SMBR
H4SMBR
H5SMBR
H6SMBR
H8SMBR
H25SMBR
H50SMBR
H100SMBR

H06SMBY
H1SMBY
H2SMBY
H3SMBY
H4SMBY
H5SMBY
H6SMBY
H8SMBY
H25SMBY
H50SMBY
H100SMBY

H06SMBB
H1SMBB
H2SMBB
H3SMBB
H4SMBB
H5SMBB
H6SMBB
H8SMBB
H25SMBB
H50SMBB
H100SMBB

HC353SMB
Hose Set: [2] 3 ft. hoses
and [1] 5 ft. Hose

HC3SMB

HC4SMB

HC5SMB

HC6SMB

HDC5MB
Hose Set: [3] 5 ft. 1/4" Hoses
and [1] 5 ft. 3/8" Hose

Replacement
Parts for
Soft Magic®
Barrier Hoses

Part#	Description
H1476	Pkg. of (6) Gaskets and (3) Depressors
HX14N-10	Pkg. of (10) Gaskets
HX14N-100	Pkg. of (100) Gaskets
H76S-10	Pkg. of (10) Valve Depressors

See HVAC/R Price List for details.

92655
Soft Magic®
Barrier Hose
Display Rack
(Holds up to
50 Hoses)



5 HVAC/R Tools

60



UniWeld Products, Inc. Fort Lauderdale, FL 33312 U.S.A. Customer Service: 800.323.2111
info@uniweld.com • www.uniweld.com